

40768 台中市工業區 37 路 25 號 TEL: (04)23502169

### Metal Industries Research & Development Centre Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.)

Testing Laboratory 0099

Date: 2022/09/16

Accreditation No.: 111TD0916-272-C01

## Certificate of Conformance for Freight Container Mechanical Seal Testing Seal Classification: High Security Seal

Customer:

Mega Fortris (Malaysia) Sdn. Bhd.

29, Jalan Anggerik Mokara 31/47, Kota Kemuning, Seksyen 31, 40460 Shan Alam, Selangor, Malaysia

Name of Article: High Security Seal Type: 2K MEGALOCK (2K ML) Serial No.: 000061~000086

Specification No. : ISO 17712:2013(E) Test Dates : 2022/09/13~2022/09/16

MIRDC, Certifies that 26 samples, 5 for each test and 1 for measurements, of the seal reference above were subjected to the following tests.

Test Item	Section Number	Classification
Evidence of Tampering (Minimum Diameter)	4.1.3	Pass
Tensile Test	5.2	High security seal (H)
Shear Test	5.3	High security seal (H)
Bending Test	5.4	High security seal (H)
Impact Test room temp	5.5	High security seal (H)
Impact Test reduced temp	5.5	High security seal (H)

Remarks: As per ISO17712:2013(E) Clause 5.1.2 "Testing is to be done once every two years".


Therefore, this report expires two years from the test completion date.

Results: The above listed tests were completed with no discrepancies noted. Refer to test report

number L0830272-T01 for complete details.

The test results contained herein pertain only to the specimens listed in this report. This report shall not be reproduced, except in full, without the written approval of MIRDC



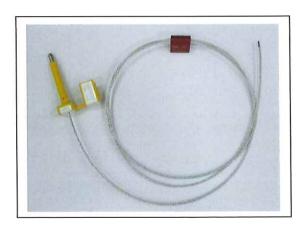



40768 台中市工業區 37 路 25 號 TEL: (04)23502169

### Metal Industries Research & Development Centre Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT



Test Report No.: L0830272-T01

Page 1 of 10

Customer:

Mega Fortris (Malaysia) Sdn. Bhd.

29, Jalan Anggerik Mokara 31/47, Kota Kemuning, Seksyen 31, 40460 Shan Alam, Selangor,

Malaysia

SUBJECT: Freight containers Mechanical seals classification Testing

Name of Article: High Security Seal Type: 2K MEGALOCK (2K ML)

Received Date: 2022/08/30

Test Dates: 2022/09/13~2022/09/16

Date Issued: 2022/09/16

RESEARCH d OFFICE OF MINING THE STATE OF TH

CHIANG, Ching-Liu

報告簽署人 (Report Authorized Person)

Su, Yuan-Da

檢驗員 (Inspector)

Note: (1) The operation and testing of MIRDC laboratory are in conformity to the requirements of ISO/IEC 17025: 2017

(Taiwan Accreditation Foundation, Accreditation No.: 0099)

(2) This report is responsible for designated samples only.

(3) Reproduction of all or parts this report without a written approval is strictly prohibited.

(4) Decision rules of conformance statement of this test report, do not consider uncertainty of measurement.



40768 台中市工業區 37 路 25 號 TEL: (04)23502169 Metal Industries Research & Development Centre

Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT



Test Report No.: L0830272-T01

Page 2 of 10

### 1. ABSTRACT

Customer:

Mega Fortris (Malaysia) Sdn. Bhd.

29, Jalan Anggerik Mokara 31/47, Kota Kemuning, Seksyen 31, 40460 Shan Alam, Selangor, Malaysia

Name of Article: High Security Seal

Type: 2K MEGALOCK (2K ML)

Serial No.: 000061~000086

Quantity Tested: 26

Inspection Reference: ISO 17712:2013(E)

Test Item	Section Number	Serial No.	Results
Evidence of Tampering (Minimum Diameter)	4.1.3	000086	See Page 3
Tensile Test	5.2	000061~000065	See Page 4
Shear Test	5.3	000066~000070	See Page 6
Bending Test	5.4	000071~000075	See Page 7
Impact Test room temp	5.5	000075~000080	See Page 8
Impact Test reduced temp	5.5	000081~000085	See Page 8



40768 台中市工業區 37 路 25 號 TEL: (04)23502169

### Metal Industries Research & Development Centre Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT



Test Report No.: L0830272-T01

Page 3 of 10

### 2. Evidence of tampering Test:

Ambient Temp. : 20°C ; 59% R.H.

Inspection Reference: ISO 17712:2013(E)

Result:

## **Evidence of tampering Section 4.1.3**

Specimen No.	Measu	Pass/Fail	
000086	Pin Head	18.42	Pass
000086	Lock Body	18.22	Pass

### Requirement:

The minimum diameter (or minimum widest cross-dimension) for the metal components of a bolt seal shall be 18 mm.



Pin Head



Lock Body



40768 台中市工業區 37 路 25 號 TEL: (04)23502169 Metal Industries Research & Development Centre

Mechanical Testing Laboratory No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT 金屬工業研究養展中心 光機電組 光機電組

Test Report No.: L0830272-T01

Page 4 of 10

### 3. Tensile Test:

Testing Instrument: Universal Testing Machine (No.TG0103)

Ambient Temp. : 20°C ; 59% R.H

Inspection Reference: ISO 17712:2013(E)

Result:

### **Tensile Test Section 5.2**

The seal was gripped in a tensile machine and a pull force applied.

Specimen No.	Requirement Load to failure	Result kN	Seal classification
000061		26.9	High security seal (H)
000062	10.0 kN: High security seal 2.27 kN: Security seal < 2.27 kN: Indicative seal	24.4	High security seal (H)
000063		21.7	High security seal (H)
000064		22.8	High security seal (H)
000065		24.1	High security seal (H)



40768 台中市工業區 37 路 25 號 TEL: (04)23502169 Metal Industries Research & Development Centre Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT




Test Report No.: L0830272-T01

Page 5 of 10

### Universal Testing Machine



Tensile Set up

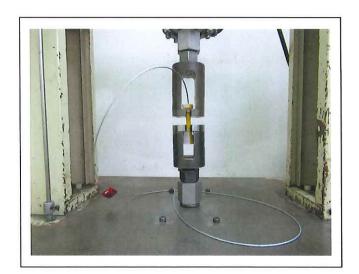



40768 台中市工業區 37 路 25 號 TEL: (04)23502169

### Metal Industries Research & Development Centre Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT



Test Report No. : L0830272-T01 Page 6 of 10

4. Shear Test

Testing Instrument: Universal Testing Machine (No.TG0103)

Ambient Temp. : 20°C ; 59% R.H.

Inspection Reference: ISO 17712:2013(E)


Result:

### **Shear Test Section 5.3**

The seal was fixed in a universal testing machine to withstand cutting with shearing blades and a compressive load applied slowly until the seal is severed.

Specimen No.	Requirement Load to failure	Result kN	Seal classification
000066	3.336 kN: High security seal 2.224 kN: Security seal <2.224 kN: Indicative seal	8.896	High security seal (H)
000067		8.896	High security seal (H)
000068		8.896	High security seal (H)
000069		8.896	High security seal (H)
000070		8.896	High security seal (H)

Shear Set up

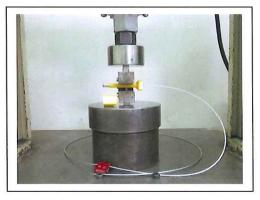

SAFETY PRECAUTIONS - Do not exceed a shear force greater than 8900N(2001lbf) .If the specimen has not failed at that force, halt the test and unload the test equipment. Record a shear force of 8896N (2000 lbf).Sudden and violent rupture of the test specimen can endanger personnel, equipment and property.



40768 台中市工業區 37 路 25 號 TEL: (04)23502169 Metal Industries Research & Development Centre

Mechanical Testing Laboratory

7th Pood Industrial Park Taichung City 40768, Taiwan (P. O. A.

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT



Test Report No.: L0830272-T01 Page 7 of 10

### 5. Bending Test

Testing Instrument : FORCE GAURE Ambient Temp. : 20℃ ; 59% R.H

Inspection Reference: ISO 17712:2013(E)

Result:


### **Bending Test Section 5.4**

Fix the locking end on the universal testing machine in a horizontal position.

Apply a load on the remaining portion of the seal at a distance (the moment arm) above the

fixed end so as to bend the seal 90 degrees.

Specimen No.	Requirement Bending moment to failure	Result Nm	Seal classification
000071	50 Nm: High security seal 22 Nm: Security seal < 22 Nm: Indicative seal	84.5	High security seal (H)
000072		79.9	High security seal (H)
000073		80.6	High security seal (H)
000074		82.5	High security seal (H)
000075		79.7	High security seal (H)

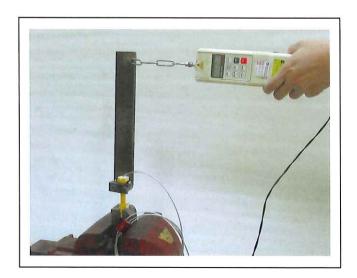

Bend Set up



40768 台中市工業區 37 路 25 號 TEL: (04)23502169 Metal Industries Research & Development Centre

Metal Industries Research & Development Centre Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT



Test Report No.: L0830272-T01

Page 8 of 10

### 6. Impact Test

Testing Instrument:

1. Impact Tester

2. Programmable Low Temp. Tester (No.SG5501)

Inspection Reference: ISO 17712:2013(E)

### **Impact Test Section 5.5**

The impact test is performed at 18 degrees C and minus 27 degrees C of temperature. The impact load is applied at the locking mechanism of the seal in the direction opposite the direction used in locking the seal.

### Result:

Impact Test at	18 ℃				
Specimen No.	Requirement	Result Joule			Seal classification
		13.56	27.12	40.68	
000076	40.68J: High security seal 27.12J: Security seal <27.12J: Indicative seal 5 impacts at each load	Pass	Pass	Pass	High security seal (H)
000077		Pass	Pass	Pass	High security seal (H)
000078		Pass	Pass	Pass	High security seal (H)
000079		Pass	Pass	Pass	High security seal (H)
080000		Pass	Pass	Pass	High security seal (H)

Specimen No.	Requirement	Result Joule			Seal classification
		13.56	27.12	40.68	
000081		Pass	Pass	Pass	High security seal (H
000082	40.68J: High security seal	Pass	Pass	Pass	High security seal (H
000083	27.12J: Security seal <27.12J: Indicative seal	Pass	Pass	Pass	High security seal (H
000084	5 impacts at each load	Pass	Pass	Pass	High security seal (H
000085		Pass	Pass	Pass	High security seal (H



40768 台中市工業區 37 路 25 號 TEL: (04)23502169 Metal Industries Research & Development Centre Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT



Test Report No.: L0830272-T01

Page 9 of 10



Impact Set up



# 財團法人金屬工業研究發展中心 機械測試實驗室 40768台中市工業區37路25號 TEL: (04)23502169


40768 台中市工業區 37 路 25 號 TEL: (04)23502169 Metal Industries Research & Development Centre Mechanical Testing Laboratory

No.25, 37th Road, Industrial Park, Taichung City 40768, Taiwan (R.O.C.) 試驗報告 TEST REPORT



Test Report No. L0830272-T01

Page 10 of 10

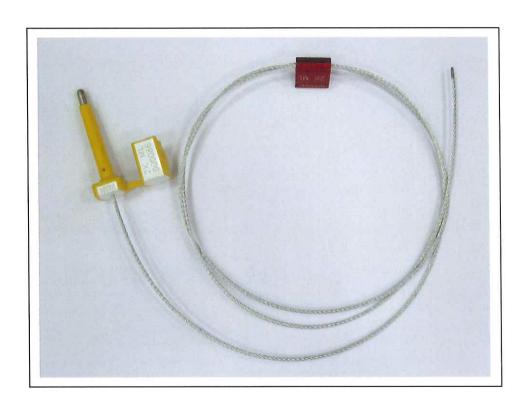

Name of Article: High Security Seal Type: 2K MEGALOCK (2K ML)

---End---